

LMB: $\Sigma \vec{F} = m\vec{a}$
 $mg\hat{e}_r - \vec{F} = m\vec{a}$
 $\vec{r} = \sqrt{x^2 + y^2}$
 $\hat{e}_r = \frac{x}{r}\hat{i} + \frac{y}{r}\hat{j}$
 $\hat{e}_\theta = -\frac{y}{r}\hat{i} + \frac{x}{r}\hat{j}$
 $\vec{a} = \ddot{r}\hat{e}_r - r\dot{\theta}^2\hat{e}_r + 2\dot{r}\dot{\theta}\hat{e}_\theta + r\ddot{\theta}\hat{e}_\theta$
 $\vec{F} = mg\hat{e}_r$
 $\vec{a} = \ddot{r}\hat{e}_r - r\dot{\theta}^2\hat{e}_r + 2\dot{r}\dot{\theta}\hat{e}_\theta + r\ddot{\theta}\hat{e}_\theta$
 $\vec{F} = m\vec{a}$
 $mg\hat{e}_r = m(\ddot{r}\hat{e}_r - r\dot{\theta}^2\hat{e}_r + 2\dot{r}\dot{\theta}\hat{e}_\theta + r\ddot{\theta}\hat{e}_\theta)$
 $\vec{F} = m\vec{a}$
 $mg\hat{e}_r = m(\ddot{r}\hat{e}_r - r\dot{\theta}^2\hat{e}_r + 2\dot{r}\dot{\theta}\hat{e}_\theta + r\ddot{\theta}\hat{e}_\theta)$
 $\vec{F} = m\vec{a}$
 $mg\hat{e}_r = m(\ddot{r}\hat{e}_r - r\dot{\theta}^2\hat{e}_r + 2\dot{r}\dot{\theta}\hat{e}_\theta + r\ddot{\theta}\hat{e}_\theta)$

1st order system
 written for
 numerical solution

Initial Conditions:

$T=0, \quad x=R, \quad y=0, \quad \dot{x}=\frac{v_0}{2}, \quad \dot{y}=\frac{v_0}{2}$
 $\Rightarrow \quad Z_1=R, \quad Z_2=\frac{v_0}{2}, \quad Z_3=0, \quad Z_4=\frac{v_0}{2}$

b) Matlab solution to problem 5.119

Global g R v0


$g=10; \quad R=6400000; \quad v0=9000;$
 $tspan=[0 \ 6670];$
 $z0=[R; v0/sqrt(2); 0; v0/sqrt(2)];$
 $[t,z]=ode45('deriv1', tspan, z0);$
 $x=z(:,1); \quad y=z(:,2);$

plot(x,y)

function zdot=deriv1(t,z);

global g R v0
 $zdot=[z(2); -g*R^2/z(1)^2; z(3); -v0^2/z(1)^2; z(4); -v0^2/z(1)^2];$

Missile Trajectory in Prob. 5.119

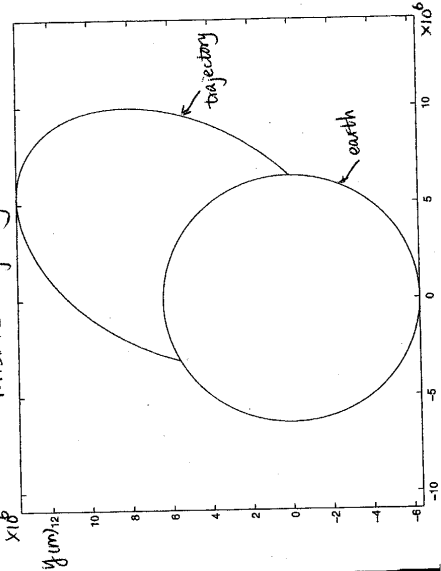

5.120



LMB: $\Sigma \vec{F} = m\vec{a}$
 $-kr = m\ddot{r}$
 $\vec{r} = \sqrt{x^2 + y^2}$
 $\hat{e}_r = \frac{x}{r}\hat{i} + \frac{y}{r}\hat{j}$
 $\hat{e}_\theta = -\frac{y}{r}\hat{i} + \frac{x}{r}\hat{j}$
 $\vec{a} = \ddot{r}\hat{e}_r - r\dot{\theta}^2\hat{e}_r + 2\dot{r}\dot{\theta}\hat{e}_\theta + r\ddot{\theta}\hat{e}_\theta$
 $\vec{F} = -kr\hat{e}_r$
 $\vec{a} = \ddot{r}\hat{e}_r - r\dot{\theta}^2\hat{e}_r + 2\dot{r}\dot{\theta}\hat{e}_\theta + r\ddot{\theta}\hat{e}_\theta$
 $\vec{F} = m\vec{a}$
 $-kr\hat{e}_r = m(\ddot{r}\hat{e}_r - r\dot{\theta}^2\hat{e}_r + 2\dot{r}\dot{\theta}\hat{e}_\theta + r\ddot{\theta}\hat{e}_\theta)$
 $\vec{F} = m\vec{a}$
 $-kr\hat{e}_r = m(\ddot{r}\hat{e}_r - r\dot{\theta}^2\hat{e}_r + 2\dot{r}\dot{\theta}\hat{e}_\theta + r\ddot{\theta}\hat{e}_\theta)$

LMB: $\hat{i} \cdot m\ddot{x} = m\ddot{x} = 0$
 $\hat{j} \cdot m\ddot{y} = m\ddot{y} = 0$

the general soln of ①:

$x = A \cos(\omega t)$

the general soln of ②:

$y = B \cos(\omega t)$

it's possible that the trajectory is a circle.

i.e. we pick $x = A \cos(\omega t), \quad y = A \cos(\omega t)$

thus $x^2 + y^2 = A^2$

hence $r_0 = A$

$v_0 = \sqrt{\dot{x}^2 + \dot{y}^2} = A\omega$

the relation between r_0 & v_0 is:

$v_0 = r_0 \omega$

since there is no external moment acting on the system, the angular momentum is conserved.

$(\Sigma M)_0 = r \times F = r \times (-kr) = 0$

thus $H_0 = mrv_0 = mrv_0$

$\Rightarrow v_0 = \frac{b}{a}v_1$

the original elliptical trajectory can be seen as:

$x = a \sin(\omega t + \phi)$
 $y = b \cos(\omega t + \phi)$

Now change to the circle orbit:


$x = A \sin(\omega t + \phi)$
 $y = A \cos(\omega t + \phi)$

at point ③: speed $v_2 = b\omega$ increases $v_2' = a\omega$

$\therefore \Delta v = v_2' - v_2 = (a-b)\omega = (a-b)\frac{v_1}{a} = \frac{14}{5}$ in vertical

lies.

#5.111



$\Delta x = (\sqrt{x^2 + y^2} + 10) - (8 + 2) = \sqrt{x^2 + y^2}$

LMB: $\Sigma \vec{F} = m\vec{a}$

LMB: $\hat{i} \cdot -k\sqrt{x^2 + y^2} = m\ddot{x} \Rightarrow m\ddot{x} + kx = 0$

LMB: $\hat{j} \cdot -k\sqrt{x^2 + y^2} = m\ddot{y} \Rightarrow m\ddot{y} + ky = 0$

From the initial condition

$x(0) = B = x_0, \quad \dot{x}(0) = A\omega = \dot{x}_0$

$\therefore x = \frac{x_0}{\omega} \sin(\omega t) + x_0 \cos(\omega t) = \frac{\dot{x}_0}{\omega} \sin \omega t + x_0 \cos \omega t$

Similarly, $y = C \sin(\omega t) + D \cos(\omega t) = \frac{\dot{y}_0}{\omega} \sin \omega t + y_0 \cos \omega t$

From the initial condition

$y(0) = D = y_0, \quad \dot{y}(0) = C\omega = \dot{y}_0$

$\therefore y = \frac{\dot{y}_0}{\omega} \sin(\omega t) + y_0 \cos(\omega t) = \frac{\dot{y}_0}{\omega} \sin \omega t + y_0 \cos \omega t$

$= \frac{\dot{y}_0}{\omega} \sin(\omega t) + (5 + y_0) \cos(\omega t) - 5$

b) Matlab solution to problem 5.111

Global m g k

$g=10; \quad m=100; \quad k=200;$
 $tspan=[0 \ pi/sqrt(2)];$
 $z0=[1; 0; -5; 0];$
 $[t,z]=ode45('deriv2', tspan, z0);$
 $x=z(:,1); \quad y=z(:,2);$

$x=-1, \quad y=-5$

$\textcircled{a} \quad t = \pi/\sqrt{2}$

then $x = z_0 \cos(\omega t) = 1 \cos(\pi/2) = 0$

$\textcircled{b} \quad t = \pi/\sqrt{2}$

$y = (5 + y_0) \cos(\pi/2) - 5 = -5 \text{ m}$

$\textcircled{c} \quad \text{when } t_0 = 1m/s - 5m/s, \quad v_0 = 0$


then $x = z_0 \cos(\omega t) = 1 \cos(\pi/2) = 0$

$\textcircled{d} \quad t = \pi/\sqrt{2}$


$y = (5 + y_0) \cos(\pi/2) - 5 = -5 \text{ m}$

$\textcircled{e} \quad t = \pi/\sqrt{2}$

#5.124



FBD:



whole

a) Since there is no external forces acting on the system, the total linear momentum is conserved.

b) the mass center can't accelerate, since no external force. Otherwise a) will also violates.

c) see above.

d) $\sum \mathbf{F} = m\mathbf{a}$

Since the mass center doesn't accelerate, we can setup an x-y frame there.

$$\Delta x = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2} - 2R$$

$$\textcircled{1}: -k(\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2} - 2R) \frac{x_1 - x_2}{\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}} = m\ddot{x}_1$$

$$-k(\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2} - 2R) \frac{y_1 - y_2}{\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}} = m\ddot{y}_1$$

$$\textcircled{2}: k(\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2} - 2R) \frac{x_1 - x_2}{\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}} = m\ddot{x}_2$$

$$k(\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2} - 2R) \frac{y_1 - y_2}{\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}} = m\ddot{y}_2$$

Since the mass center won't change.

$\therefore x_1 = -x_2, y_1 = -y_2$ $\therefore \textcircled{1} \& \textcircled{2}$ are just in the opposite direction relative to the origin.

e) No friction
the total energy is conserved $E_k + E_p = \text{const} = E_{k0} + E_{p0}$

$$K_E = \frac{1}{2} m(\dot{x}_1^2 + \dot{y}_1^2) + \frac{1}{2} m(\dot{x}_2^2 + \dot{y}_2^2)$$

$$K_p = \frac{1}{2} k(\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2} - 2R)^2$$

* Note: We assume that the initial velocity of the system (cm) is zero.

f)

%Matlab solution to problem 5.124

global m R k

```
R=5; m=2; k=10;
tspan=[0 10];
z0=[5;-1;5;2];
[t,z]=ode45('deriv3',tspan,z0);
x1=z(:,1); y1=z(:,3);
x2=-x1; y2=-y1;
```

```
plot(x1,y1);
hold on;
plot(x2,y2,'--');
Axis equal
```

function zdot=deriv2(t,z);

```
global R m k
zdot=[z(2); -2*k/m*z(1)*(sqrt(z(1)*z(1)+z(3)*z(3))-R)/sqrt(z(1)*z(1)+z(3)*z(3));
z(4); -2*k/m*z(3)*(sqrt(z(1)*z(1)+z(3)*z(3))-R)/sqrt(z(1)*z(1)+z(3)*z(3))];
```

